

# 200

## CARATTERISTICHE

- **Corpo** in alluminio di lega speciale.
- **Forza** di chiusura variabile **EN 2-4** per porte da 750 a 1100 mm. di larghezza.
- Due valvole antisfilamento per controllo indipendente della velocità di chiusura, scatto finale e/o chiusura ammortizzata.
- **Universale** per montaggio normale lato cerniera o rovesciato lato opposto cerniera.
- **Apertura** a 180° con montaggio normale.
- **Finiture:** Argento, nero, bianco.


## FEATURES:

- **Body** in special alloy aluminium.
- **Variable** closing force sizes **EN 2-4** for doors 750 -1100 mm. wide
- **Two valves** for independent hydraulic control of closing speed and of final latch or final damping.
- **Universal** for regular mounting (pull side) or reversed mounting (push side).
- **Opening** to 180° for regular mounting.
- **Finishes:** silver, black, white.

**MAB MAKES DOOR CLOSING EASY**

## DIMENSIONI

## DIMENSIONS

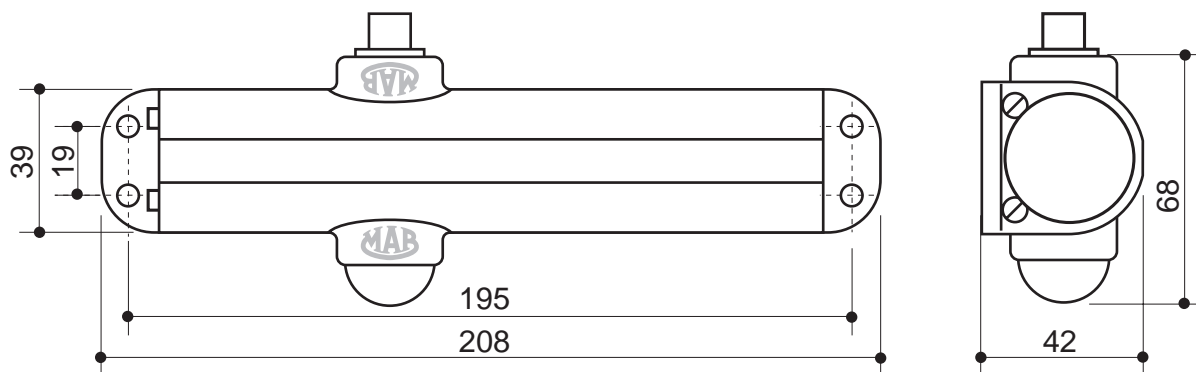


## ACCESSORI

## ACCESSORIES

### AC 348

Braccio standard


*Regular arm*

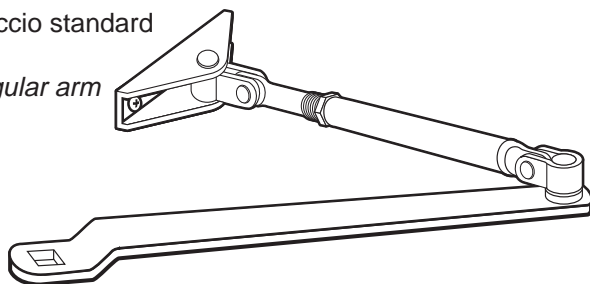

### AC 349

Braccio con  
fermo regolabile


*Adjustable  
Hold Open arm*

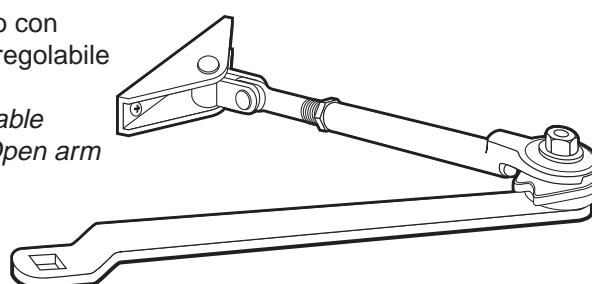

### AC 358


Braccio a slitta con dispositivo di fermo amovibile

*Sliding arm and rail with removable Hold Open device*

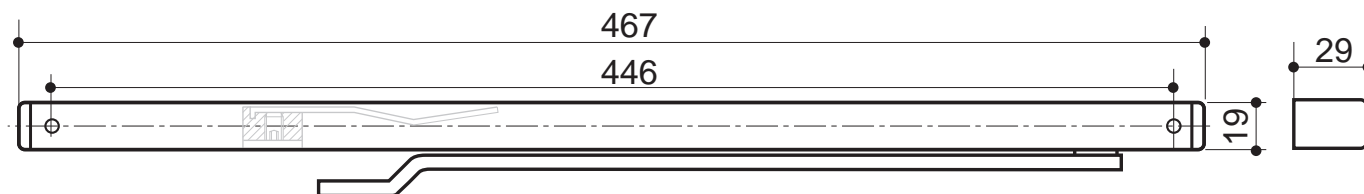

## MONTAGGI

## MOUNTINGS

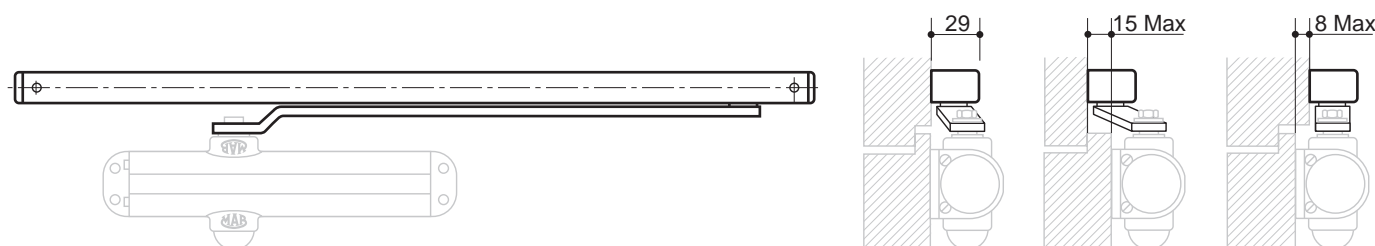

**MAB S.p.A.**  
Via del Tuscolano, 6  
40128 BOLOGNA (ITALY)  
Tel. +39.0513540711  
Fax. +39.051325108  
E-mail: mab@mab-spa.com