


**Umlenkschloss**

**Door selector**

**4661**

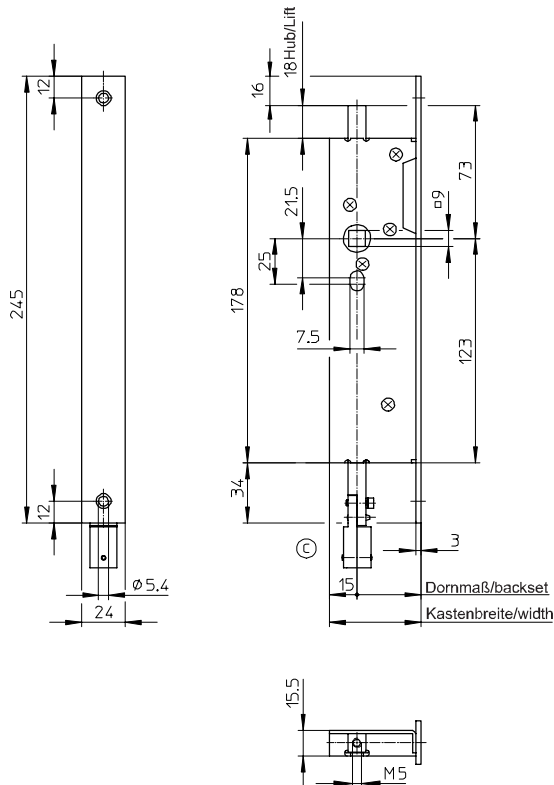

Art. Nr./Art. No.		4661							
Dornmaße/Backsets	mm	30	35	40	45	50	55	60	65
Kastenbreiten/Widths	mm	45	50	55	60	65	70	75	80

Rohrrahmen-Umlenkschloss für Standflügel inkl. Anschlusskupplung zum Anti-Panik-Gegenkasten, ganz verzinkt, Stulp Nirosta, Anschlussgewinde M5, Stangenausschluss 18mm, nur in Verbindung mit Art. 4663 (ab 35mm Dorn) und Art 4660 (nur 30mm Dorn).

**Funktion**

Durch das Umlenkschloss wird die Drehbewegung des ca. 1500mm über OFF angebrachten Türdrückers in eine Schubbewegung der Treibriegelstangen umgelenkt.

**Sonderausführungen**

- 22mm oder 24mm U-Stulp
- 22mm Flachstulp
- Nussüberwachung inkl. 6m Kabel

Door selector for inactive leaves of metal frame double doors, inclusive of connection coupler for the panic keep, fully galvanized, stainless steel face plate, M5 connector thread, shoot bolt projection 18mm, only to be used in conjunction with Art. 4663 (from 35mm backset) and Art. 4660 (only 30mm backset).

**Function**

The door selector converts the rotation of the door lever located approximately 1500mm above FFL into a sliding movement of the shoot bolts.

**Optional designs**

- ,U' face plate 22mm or 24mm
- face plate 22mm
- latch bolt monitoring device including 6m cable