WILKA®
SCHLIESSTECHNIK

Rohrrahmen-Umlenkschloss für Standflügel

Door selector for inactive leaves

460U

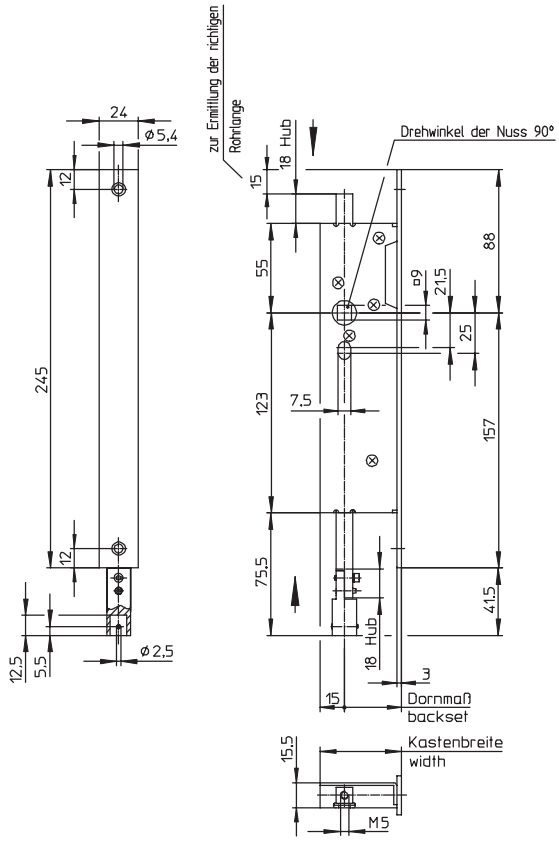

Art. Nr./Art. No.		460U						
Dornmaße/Backsets	mm	35	40	45	50	55	60	65
Kastenbreiten/Widths	mm	50	55	60	65	70	75	80

Rohrrahmen-Umlenkschloss für Standflügel inkl. Anschlusskupplung zum Anti-Panik-Gegenkasten, ganz verzinkt, Stulp Nirosta, Anschlussgewinde M5, Stangenausschluss 18 mm, Drehwinkel der Nuss 90°, nur in Verbindung mit Art. 460E.

Funktion:

Durch das Umlenkschloss wird die Drehbewegung des ca. 1500 mm über OFF angebrachten Türdrückers in eine Schubbewegung der Treibriegelstangen umgelenkt.

Sonderausstattung:
- Nussüberwachung inkl. 6m Kabel

Door selector for inactive leaf of metal frame doors including connecting coupling to panic keep, fully galvanised, stainless steel face plate, M5 connector, bolt projection 18mm, rotation angle fo follower 90°, only to be used in conjunction with article no. 460E.

Function:

The door selector causes the rotary movement of the handle lever located approx 1500 above FFL to be converted into a upward movement of the shoot bolts.

Optional designs:
- Follower monitoring device including 6m cable