

Optimus3 - 72mm Spec lockcases

2E27

Euro Profile Mortice Bathroom Lock



Application:


- Modular lockcase range for doors hinged on the left or right
- European style casing with 78mm centres which are designed to suit either 5mm or 8mm bathroom spindles
- Single throw - 20mm deadbolt throw when key is turned once
- Latch bolt withdrawn by the lever handle from either side
- Dead bolt locked or unlocked by a separate privacy turn on the inside
- Pierced to accept bolt through furniture and privacy turn/release
- Suitable for sprung and unsprung lever furniture up to a maximum of 0.97Kg

Specification:

- 5mm spindle adaptor supplied for the bathroom furniture
- Profiled latch bolt for smooth and positive engagement during operation
- Two piece forend for clean aesthetics
- Easily reversible latch bolt
- Available with radiused or square forend and strike
- Supplied with an adjustable formed strike
- **Positive 1° follower angle to help maintain the appearance of the door furniture over time by reducing lever droop**
- Reference: 2E27
- Case Size: 90mm
- Backset: 60mm
- Centres: 78mm
- Case: Steel, painted
- Forend: Stainless steel
- Striking Plate: Stainless steel
- Deadbolt: Steel, hard chrome plated
- Latch Bolt: Steel, hard chrome plated
- Follower: 8mm
- Bathroom Follower: 8mm with a 5mm adaptor
- Cylinder Type: Euro profile (not supplied)

Finish:

- SS - Stainless Steel

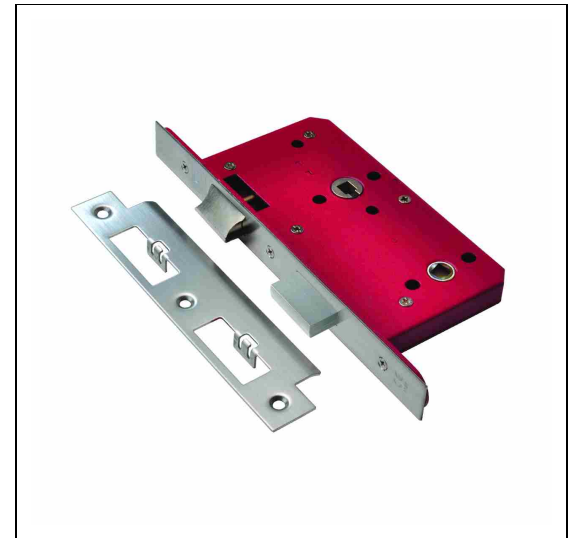

Standards:

- Tested to BS EN 12209 : 2003

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 3 | X | 8 | 1 | 0 | G | - | B | G | 2 | 0 |
|---|---|---|---|---|---|---|---|---|---|---|
- EN 1634-1 assessed for use on 60 minutes timber fire doors
- EC Certificate number
 - 1121-CPD-AG5008
- Assists in fulfilling duties required under the Equality Act. Satisfies recommendations of BS8300 and Approved Document M (ADM)
- 10 year guarantee



Optimus3 - 72mm Spec lockcases


2E27

Euro Profile Mortice Bathroom Lock



ASSA ABLOY

Technical
Design:

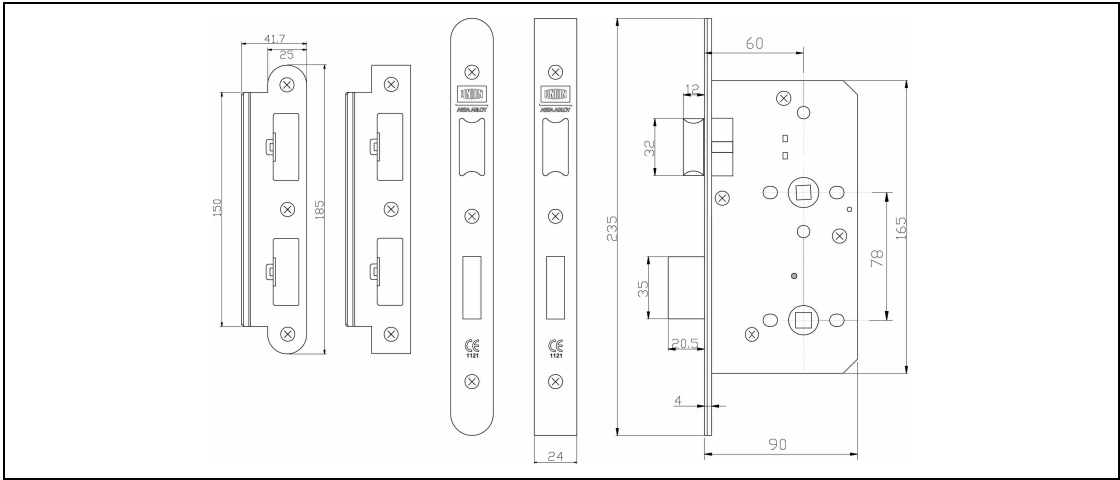

Variants:

| | |
|-------------|--------------------------------|
| J2E27S-SS60 | Square forend & striking plate |
| J2E27R-SS60 | Round forend & striking plate |