


Product line 55 DZ

Mortice lock
with 2-cylinder keyway
for burglar resistant doors
WK 2 qualified
according to DIN 18 251-1 Class 5
and DIN EN 1627



Classification code according to EN 12 209:										
3	S	5	1	0	G	6	B	C	2	0

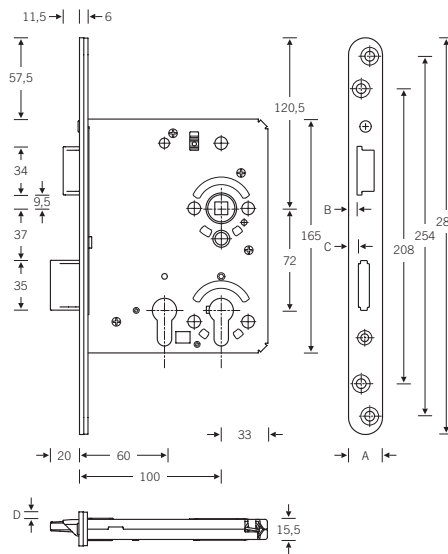

Dimens. A	Dimens. B	Dimens. C	Dimens. D
20	3,4	4,0	1,4
24	6,0	6,6	4,0

Mortice lock	ES
Product line 55	53
PZ double-turn with key operated double cylinder	PZW WC
flat double forend: rounded	FR
forend plate width: 20 mm	20
backsets: 60 mm	60
100 mm	100
centres: PZ 72 mm	72
square follower size: 8 mm □	08
9 mm □	09
handing details: RH	RS
LH	LS
forend design: stainless steel	EST
fine satin	
(material no. 1.4301)	

Equipment

- self-tightening follower in galvanised steel
- steel-ring follower bearings
- latch bolt as galvanised steel casting
- deadbolt in rugged, heat-treated special-grade steel
- lock case wholly enclosed
- chip guards
- Double forend 6 mm
- Fire-resistant with 9mm follower

Options (please note delivery times)

- stainless steel forend lacquered:
 - metallic silver silb
- 10mm square follower hole 10
- Forend length 235 mm 235
- forend width 24 mm 24
- mechanical locking indicator SAZ
- single forend

Example for article identification:

ET 55 PZW DZ FR 20 | 100 72 08 RS ES