


138F

Mortise latch lock

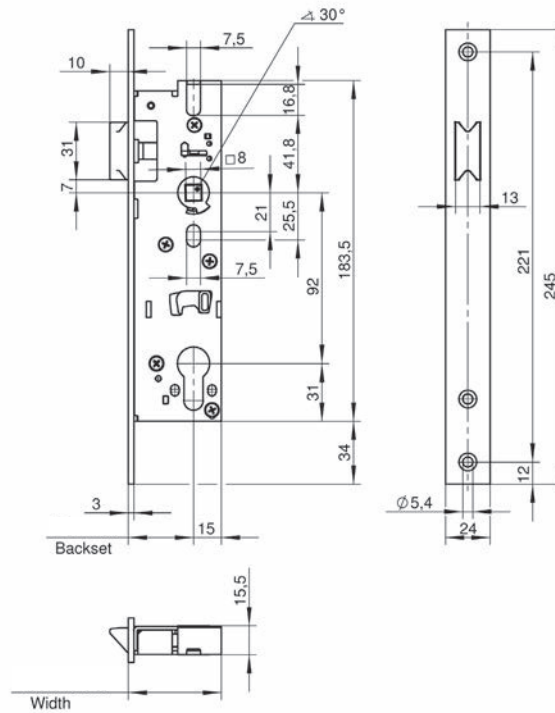

EN 12209

4

Mortise latch lock for metal frame doors, prepared for profile cylinder, zinc plated lock case, solid follower, with action of the key on the latch bolt, top and bottom of lock case closed. Certified as per EN 12209.

138F		Standard designs and special designs					
Backset in mm	25 30 35 40 45					Forend 16, 20 or 22 mm	<input type="checkbox"/>
Widths in mm	40 45 50 55 60					U-shaped forend 22 or 24 mm	<input type="checkbox"/>
Dead bolt throw 20mm		-				Controlled latch bolt stop (FS approval not applicable)	-
Follower in mm		8	9	10		Prepared for RZ 22 (swiss standard)	<input type="checkbox"/>
Reversible latch bolt		<input checked="" type="checkbox"/>				Dead bolt monitoring device including 10m cable	-
Latch bolt extended 3 or 5 mm		<input type="checkbox"/>				Follower monitoring device including 8m cable	<input type="checkbox"/>
Dead bolt extended 3 or 5 mm		-				Refurbishment forend 380 mm	-
Forend steel zinc plated		<input checked="" type="checkbox"/>				Fire doors	-
Latch bolt nickel-plated		<input type="checkbox"/>				For burglar resistance doors according to EN 1627 RC2	-
Forend 24 mm		<input checked="" type="checkbox"/>				Matching striking plates on page	207

Standard design Special design