


152P

Mortise lock with roller bolt

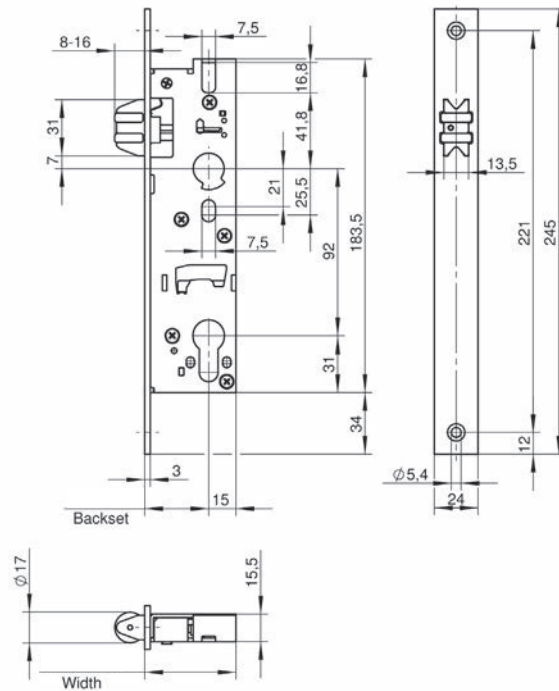

EN 12209

4

Mortise lock **with roller bolt**, zinc plated lock case, adjustment range of latch bolt 8-16 mm, top and bottom of lock case closed. Certified as per EN 12209.

152P		Standard designs and special designs					
Backset in mm	25 30 35 40 45					Forend 22 mm	<input type="checkbox"/>
Widths in mm	40 45 50 55 60					U-shaped forend 22 or 24 mm	<input type="checkbox"/>
Dead bolt throw		-				Controlled latch bolt stop (FS approval not applicable)	-
Follower in mm		8	9	10		Prepared for RZ 22 (swiss standard)	-
Reversible latch bolt		-				Dead bolt monitoring device including 10 m cable	-
Latch bolt extended		-				Follower monitoring device including 8 m cable	-
Dead bolt extended		-				Refurbishment forend 380 mm	-
Forend steel zinc plated		<input checked="" type="checkbox"/>				Fire doors	-
Latch bolt nickel-plated		<input type="checkbox"/>				For burglar resistance doors according to EN 1627 RC2	-
Forend 24 mm		<input checked="" type="checkbox"/>				Matching striking plates on page	209

Standard design Special design