




ITS6.224 Size 2-4 Concealed Cam Action Door Closer

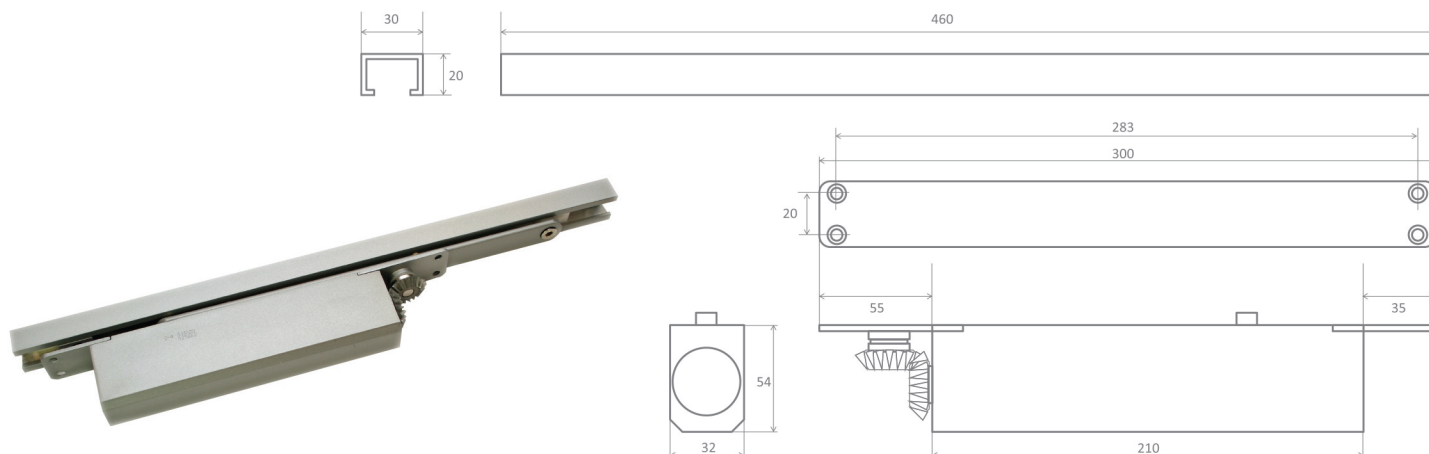

Product Overview:

A high efficiency, true cam action concealed slide arm closer. Suitable for most applications particularly those with public use.

3 8 3 1 1 3

Testing & Standards:

- CE marked against EN1154
- Included in successful fire test to EN1634
- Suitable for use on timber fire doors
 - 44mm - 30 minutes fire resistance
 - 54mm - 60 minutes fire resistancewith suitable intumescent pack
- Safe in use
- High corrosion resistance

BS8300/Equalities Act/Approved Document 'M'

The ITS6.224 concealed overhead door closer has an opening force (0-30°) less than 30N when fitted to a minimum door width of 803mm and has an opening force (30-60°) less than 22.5N when fitted to a minimum width door of 573mm.

The suitable width of door for the ITS6.224 overhead door closer shall be 803mm.

NOTE : BS 8300 requirements are for the whole door set and therefore the minimum suitable door width will increase when the door closer is fitted with other items of ironmongery. Site conditions may also affect performance.

Specification

Closing Force	EN Size	3**
Door Size (max)	Width (mm)	950
	Weight (kg)	60
Body Dimensions	Length (mm)	210
	Width (mm)	32
	Depth (mm)	54
Application	Concealed	y
Mechanism	Cam	y
Power Shoe Bracket		n
Angle Of Opening		110°
Non Handed		y
Power Adjustment By Spring		y
Power Adjustment By Position		n
Adjustable Sweep Speed		y
Adjustable Latch Speed		y
Adjustable Mechanical Backstop		y
Adjustable Delayed Action		n
Guarantee	Years	25

Options

Architrave Brackets	n
Drop Plates	n
Track Hold-Open Device (not suitable for use on fire doors)	y*
Hollow Door Fixing Pack	n
Intumescent Pack For Fire Door Installation	y

Cover Options

Radius Edge	n
Semi-Radius	n
Full-Radius	n
Square	n

Finish Options

Arm And Track	SIL, SSS, PSS, PB, RAL, BRONZE
---------------	--------------------------------------

* these options are not covered by CE

** optional size 2-4 not covered by CE