





TS6.224 Size 2-4 Architectural Slimline Cam Action Door Closer

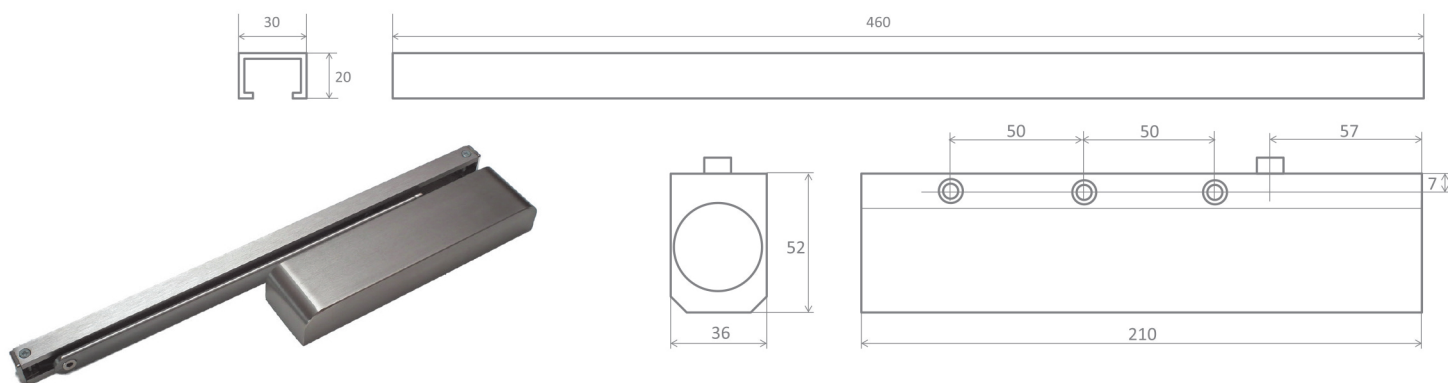

Product Overview:

A high efficiency, true cam action slide arm closer. Suitable for most applications particularly those with public use.



Testing & Standards:

- CE marked against EN1154
- Included in successful fire test to EN1634
- Suitable for use on timber fire doors of up to 120 minutes fire resistance
- Safe in use
- High corrosion resistance

BS8300/Equalities Act/Approved Document 'M'

The TS6.224 Overhead door closer (Standard fixing position) has an opening force (0-30°) less than 30N when fitted to a minimum width door of 803mm, and has an opening force (30-60°) less than 22.5N when fitted to a minimum width door of 573mm.

Therefore the suitable width of door for the TS6.224 Overhead door closer when fitted in the above fixing position shall be 803mm.

NOTE : BS 8300 Requirements are for the whole door set and therefore the minimum suitable door width will increase when the door closer is fitted with all other items of ironmongery on site.

Specification

Closing Force (Fig 1)	EN Size	3-4
Door Size (max)	Width (mm)	1100
	Weight (kg)	80
Body Dimensions	Length (mm)	210
	Width (mm)	52
	Depth (mm)	36
Application	Regular Fig. 1	y
	Parallel Arm Fig. 6	y*
	Transom Fig. 61	y*
Mechanism	Cam	y
Power Shoe Bracket		n
Angle Of Opening		110°
Non Handed		y
Power Adjustment By Spring		y
Power Adjustment By Position		n
Adjustable Sweep Speed		y
Adjustable Latch Speed		y
Adjustable Mechanical Backstop		o*
Adjustable Delayed Action		n
Guarantee	Years	25

Options

Architrave Brackets	n
Drop Plates	n
Track Hold-Open Device (not suitable for use on fire doors)	y*
Hollow Door Fixing Pack	n
Saddle Bracket For Glass Door Installation	n
Mounting Plate	y

Cover Options

Radius Edge	n
Semi-Radius	y
Full-Radius	n
Square	n

Finish Options

Cover & Matching Guide Rail	SIL, SSS, PSS, PB, RAL, BRONZE
-----------------------------	--------------------------------------

* these options are not covered by CE