


1472

Mortise lock

EN 12209

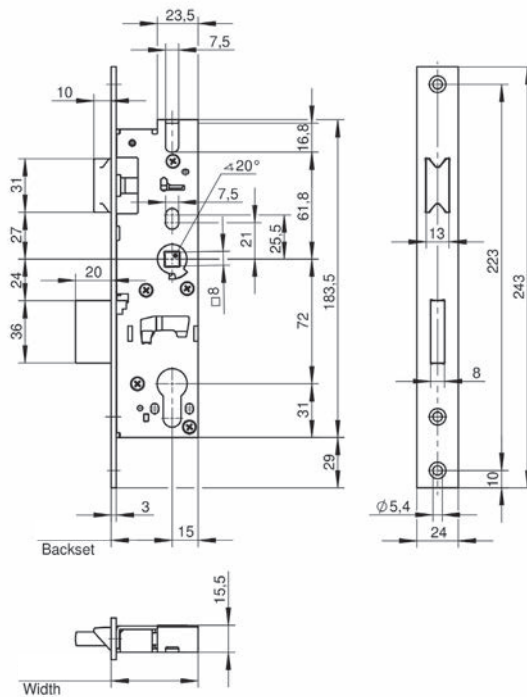

Mortise lock for metal frame doors, prepared for profile cylinder, solid follower, with action of the key on the latch bolt, 1 turn, zinc plated lock case, **distance 72 mm**. According to EN 12209.

1472						Standard designs and special designs	
Backset in mm	25	30	35	40	45	Forend 16, 20 or 22 mm	-
Widths in mm	40	45	50	55	60	U-shaped forend 22 or 24 mm	-
Dead bolt throw 20mm				■		Controlled latch bolt stop (FS approval not applicable)	-
Follower in mm		8	9	10		Prepared for RZ 22 (swiss standard)	-
Reversible latch bolt				■		Dead bolt monitoring device including 10m cable	-
Latch bolt extended 5 mm				□		Follower monitoring device including 8 m cable	-
Dead bolt extended 5 mm				□		Refurbishment forend 380 mm	□
Forend steel zinc plated				-		Fire doors	-
Forend stainless steel Latch and dead bolt nickel-plated				■		For burglar resistance doors according to EN 1627 RC2	-
Forend 24 mm				■		Matching striking plates on page	201, 204

■ Standard design □ Special design

4