


148R

2-turn mortise lock

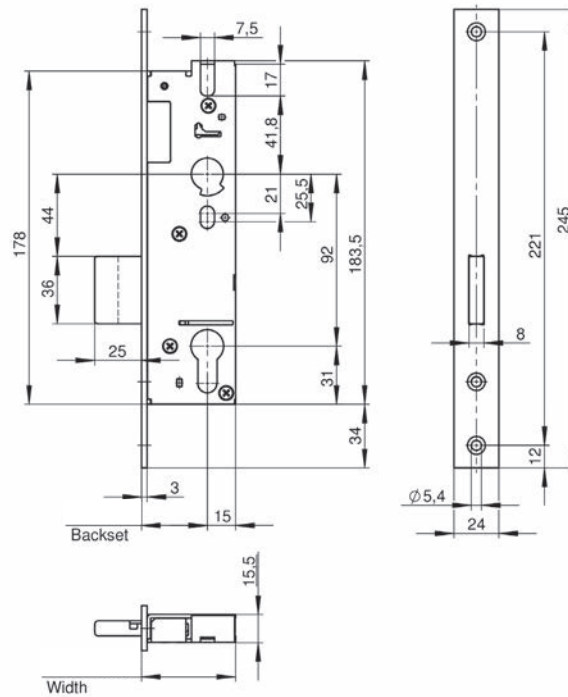

EN 12209

Mortise dead lock for metal frame doors, prepared for profile cylinder, zinc plated lock case, **2 turn**, top and bottom of lock case closed. Certified as per EN 12209.

148R					Standard designs and special designs	
Backset in mm	30	35	40	45	Forend 16, 20 or 22 mm	*
Widths in mm	45	50	55	60	U-shaped forend 22 or 24 mm	*
Dead bolt throw 25 mm			■		Controlled latch bolt stop (FS approval not applicable)	*
Follower in mm		8	9	10	Prepared for RZ 22 (swiss standard)	*
Reversible latch bolt			*		Dead bolt monitoring device including 10m cable	*
Latch bolt extended 3 or 5 mm			*		Follower monitoring device including 8m cable	*
Dead bolt extended 3 or 5 mm			*		Refurbishment forend 380 mm	*
Forend steel zinc plated			*		Fire doors	*
Dead bolt nickel-plated			■		For burglar resistance doors according to EN 1627 RC2	*
Forend 24 mm			■		Matching striking plates on page	208

■ Standard design □ Special design

* On request