


Anti-Panik-Gegenkasten mit E-Öffner

panic keep with electric strike



462E

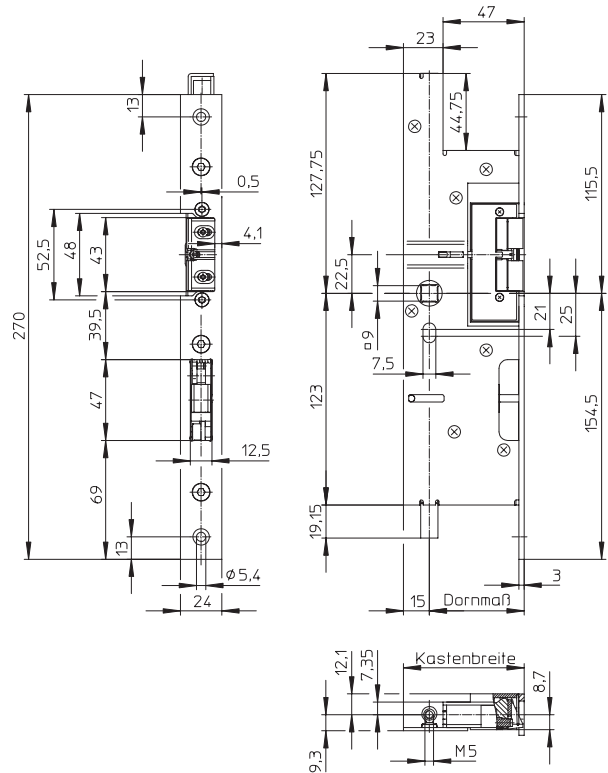

Art. Nr./Art. No.	462E		
Dornmaße/Backsets	mm	55	60 65
Kastenbreiten/Widths	mm	70	75 80

Anti-Panik-Gegenkasten für Standflügel, mit E-Öffner ET 10, ganz verzinkt, Stulp Nirosta, Anschlussgewinde M5, Stangenausschluss 18mm, Drehwinkel der Nuss 40°.

Funktion:

Beim Bestromen des E-Öffners kann der Gangflügel geöffnet werden. Bei Betätigung eines Türdrückers oder eines Stangengriffs/Druckstange werden die Treibriegelstangen des Gegenkastens eingezogen. Gleichzeitig werden Falle und Riegel des Gangflügelschlosses zurückgeschoben.

Sonderausführung:

- Riegelüberwachung inkl. 6m Kabel

Bei Bestellung bitte E-Öffner-Ausführung angeben (siehe Seite 07-16)

Panic keep for inactive leaf with electric door strike ET 10, fully galvanised, stainless steel face plate, M5 connector, bolt projection 18mm, rotation angle of follower 40°.

Function:

The inactive leaf can be opened provided the electric door strike is supplied with power. Activation of a lever or panic bar causes the shoot bolts of the keep to retract. At the same time the latch and dead bolt of the active leaf is being retracted.

Optional designs:

- Dead bolt monitoring device including 6m cable

Indicate E-opener execution when ordering (see page 07-16)