# **Optimus3 - 72mm Spec lockcases**

#### 2E21

### **Euro Profile Mortice Sashlock**




## Application:

- Modular lockcase range for doors hinged on the left or right
- European style casing with 72mm centres which are designed to suit DIN standard Euro profile cylinders
- Single throw 20mm deadbolt throw when key is turned once
- Latch bolt withdrawn by the lever handle from either side
- · Pierced to accept bolt through furniture and security roses
- Suitable for sprung and unsprung lever furniture up to a maximum of 0.97Kg

#### Specification:

- Profiled latch bolt for smooth and positive engagement during operation
- Two piece forend for clean aesthetics
- Easily reversible latch bolt
- · Available with radiused or square forend and strike
- Supplied with an adjustable formed strike
- Positive 1º follower angle to help maintain the appearance of the door furniture over time by reducing lever droop
- Cylinder to latch functionality
- Reference: L2E21 • Case Size: 90mm • Backset: 60mm • Centres: 72mm
- · Case: Steel, painted • Forend: Stainless steel
- Striking Plate: Stainless steel
- Deadbolt: Steel, hard chrome plated
- Latch Bolt: Steel, hard chrome plated
- Follower: 8mm
- Cylinder Type: Euro profile (not supplied)
- · SS Stainless Steel



#### Standards:

- Tested to BS EN 12209: 2003 3 X 8 1 0 G 3 B A 2 0
- EN 1634-1 assessed for use on 60 minutes timber fire doors
- EC Certificate number
  - 1121-CPD-AG5004
- Assists in fulfilling duties required under the Equality Act. Satisfies recommendations of BS8300 and Approved Document M (ADM)
- 10 year guarantee








#### Technical Design:

Finish:

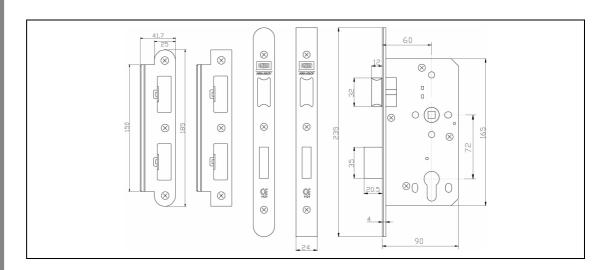

# **Optimus3 - 72mm Spec lockcases**

2E21

**Euro Profile Mortice Sashlock** 



### Variants:

JL2E21S-SS60	Square forend & striking plate
JL2E21R-SS60	Round forend & striking plate