

# Optimus3 - 72mm Spec lockcases

2E26

Euro Profile Emergency Escape Lock



ASSA ABLOY

## Application:


- Modular lockcase range for doors hinged on the left or right
- Suitable for use on emergency applications when used with the UNION J-1000 furniture
- European style casing with 72mm centres which are designed to suit DIN standard Euro profile cylinders
- Single throw - 20mm deadbolt throw when key is turned once
- Latch bolt withdrawn by the lever handle from either side
- Dead bolt and latch bolt withdrawn simultaneously in a single operation by lever handle on the inside
- Lock function is reliant on the users ability to correctly operate the lever handles
- Pierced to accept bolt through furniture and security roses
- Suitable for sprung and unsprung lever furniture up to a maximum of 0.97Kg
- Supplied with a split spindle to suit the majority of lever handles

## Specification:

- Profiled latch bolt for smooth and positive engagement during operation
- Two piece forend for clean aesthetics
- Easily reversible latch bolt
- Available with radiused or square forend and strike
- Supplied with an adjustable formed strike
- **Positive 1° follower angle to help maintain the appearance of the door furniture over time by reducing lever droop**
- Cylinder to latch functionality
- Reference: L2E26
- Case Size: 90mm
- Backset: 60mm
- Centres: 72mm
- Case: Steel, painted
- Forend: Stainless steel
- Striking Plate: Stainless steel
- Deadbolt: Steel, hard chrome plated
- Latch Bolt: Steel, hard chrome plated
- Follower: 8mm
- Cylinder Type: Euro profile (not supplied)

## Finish:

- SS - Stainless Steel

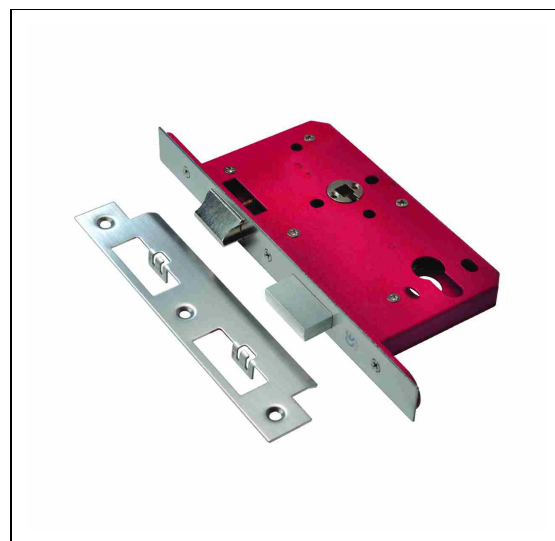

## Standards:

- Tested to BS EN 179 : 2008

3	7	6	B	1	3	4	2	A	D
---	---	---	---	---	---	---	---	---	---

3	7	6	B	1	3	4	2	A	B
---	---	---	---	---	---	---	---	---	---

For EN179 compliance the UNION

J-1000RRS01 lever furniture must be used

- EN 1634-1 assessed for use on 60 minutes timber fire doors
- EC Certificate number
  - 1121-CPD-ABB5001
- Assists in fulfilling duties required under the Equality Act. Satisfies recommendations of BS8300 and Approved Document M (ADM)
- 10 year guarantee




# Optimus3 - 72mm Spec lockcases

2E26

Euro Profile Emergency Escape Lock



Technical  
Design:

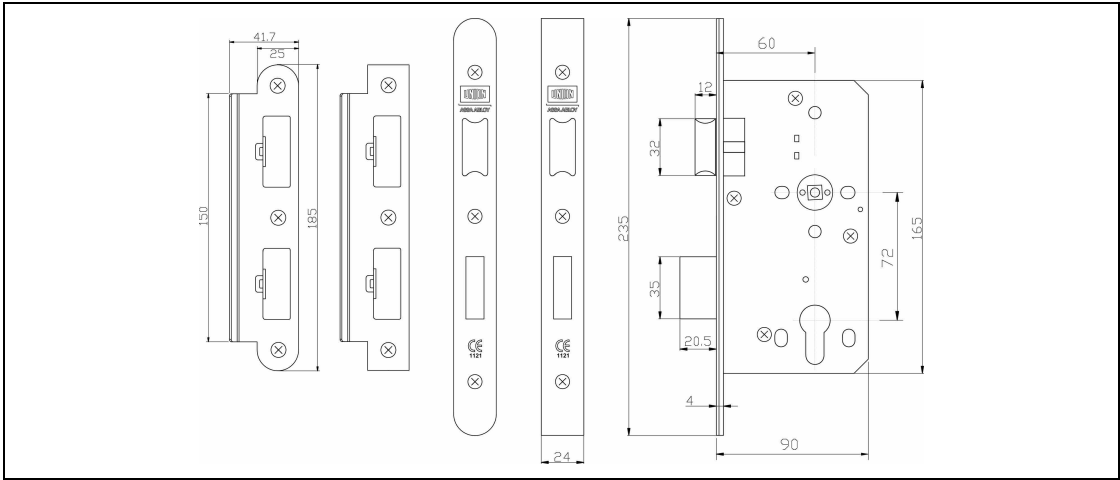

Variants:

JL2E26S-SS60	Square forend & striking plate
JL2E26R-SS60	Round forend & striking plate